


PINTLE EQUIPMENT TRANSPORT

G.V.W.R.	25,900#	AXLES	Two 10,000# Heavy Duty Dual Wheel Air Brake - Oil Bath
G.A.W.R. (Ea. Axle)	10,000#	SUSPENSION	Hutch 9700 Adjustable
COUPLER	60K 3" ID Pintle Eye	TIRE	ST235/85R16 Load Range E
SAFETY CHAINS	3/8" Grd. 70 w/Safety Latch Hooks (2 ea.)	WHEEL	16 X 6 Dual 8 Bolt
JACK	12,000# Screw Type Drop Leg Jack	FLOOR	2" Nominal Oak (S4S)
TONGUE	Integral w/ Frame	LIGHTS	D.O.T. Stop, Tail, Turn and Clearance
TOP RAIL	(none)	ELEC. PLUG	7 Way Semi Style
FRAME	12" - 16# I-Beam	FINISH (BED)	Acid Etched w/White Phosphorus, Undercoated w/Panther 813 & Two Coats Primer
CROSSMEMBERS	6" Jr. I-Beam	FINISH	Painted w/2 Coats High Solid Supreme Acrylic Automotive Grade Enamel, and Prinstriped
SIDE RAILS	8" Channel		

- Anti-Skid Brake System on Front Axle
- Rubber Mounted Sealed Lighting
- 8" Channel Side Rails
- Safety Reflective Marker Tape
- Bolt On Jack
- (2) Side Bed Steps
- 10K Heavy Duty Oil Bath w/ 12 1/2" X 4" Air Brakes, Including Automatic Slack Adjusters & Spring Brakes on Both Axles
- Low Profile Bed
- 5' Dove Tail w/ Double Hinged Spring Assist Ramps
- Oak Flooring
- Modular Sealed Wiring Harness w/Junction Box
- Storage Area In Tongue
- 102" Wide
- Six 5/8" o.d. D-Rings
- 3 Position Pintle Adjustment

20AD-20+5

DIMENSIONS- WITH DOVETAIL			
LENGTH	A	B	C
20'+5'	300"	113"	187"
24'+5'	348"	137"	211"

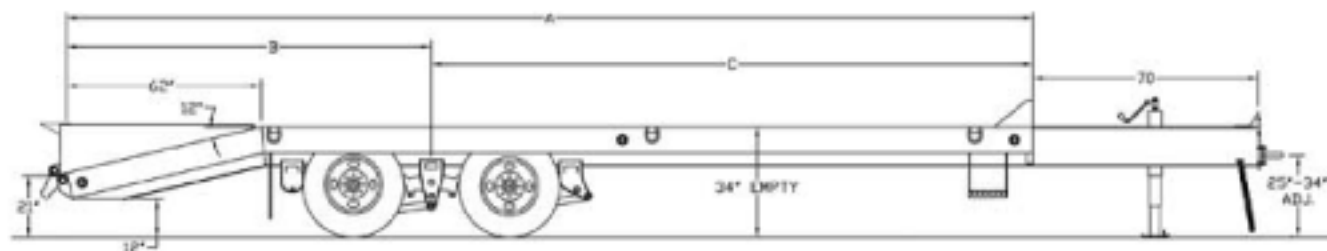

PRICING

MODEL #	WEIGHT	DESCRIPTION	PRICE
20AD-20+5	6,000#	102" X 20' Tandem Dual 25,900# Pintle	
20AD-24+5	7,120#	102" X 24' Tandem Dual 25,900# Pintle	

OPTIONS

16" Spare Tire & Wheel LR-E	
Locking Lid Over Tool Storage In Tongue	
Vertical Spare Mount on Tongue	
ABS on 2nd Axle	
Extra 5/8" D-Rings (ea.)	
Single 2 Speed Drop Leg Jack (25K)	
Dual 2 Speed Jack Set (150K)	
L.E.D. Lighting	