

TANDEM DUAL AXLE GOOSENECK/PIN-

G.V.W.R.	20,000#	AXLES	Two 10,000# Dual Wheel Electric Brake
G.A.W.R. (Ea. Axle)	9,760#	SUSPENSION	Multi-Leaf Slipper Spring w/ Equalizer
COUPLER	2-5/16" Ball Adjustable Pipe or Pintle	TIRE	750 X 16 Load Range E
SAFETY CHAINS	3/8" Grd. 70 w/ Safety Latch Hook (2 ea.)	WHEEL	16 X 6 Dual 8 Bolt
JACK	Dual - 12,000# Drop Leg Jacks (Bolted On)	FLOOR	2" Pine
NECK	10" Channel (If Applicable)	LIGHTS	D.O.T. Stop, Tail, Turn and Clearance
TOP RAIL	(none)	ELEC. PLUG	7-Way RV
FRAME	12" - 16 # I-Beam	FINISH (PINT)	Acid Etched w/White Phosphorus, Undercoated w/Parther 813 & Two Coats Primer
CROSSMEMBERS	3" Channel	FINISH	Painted w/2 Coats High Solid Supreme Acrylic Automotive Grade Enamel, and Pinstriped
SIDE RAILS	6" Channel w/ Rub Rail and Side		

- Complete Break-A-Way System w/ Battery & Charger
- Rubber Mounted Sealed Lighting
- 102" Overall Width
- 5' Dovetail w/ Double Hinged Fold-Over Ramps
- 3/8" Heavy Duty Rub Rail
- Spare Mount
- Safety Reflective Marker Tape
- Bolt On Jacks w/ Greasable Handle
- Two 10,000# Oil Bath Axles
- Dual 12K Drop Leg Jacks/Single on PH

20GN-20+5


DIMENSIONS - WITH DOVETAIL			
Length	A	B	C
20+5	300"	196"	104"
24+5	348"	232"	116"



(STD. MODEL - NO OTHER OPTIONS AVAILABLE)

20PH-20+5

DIMENSIONS - WITH DOVETAIL			
MODEL	A	B	C
20+5	240	196	44
24+5	288	232	56

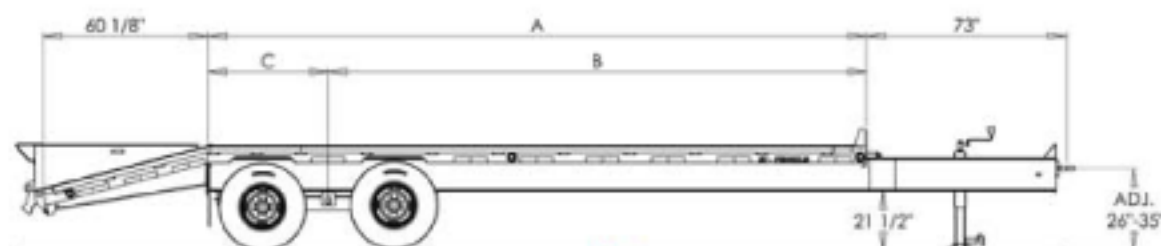

PRICING

MODEL #	WEIGHT	DESCRIPTION	PRICE
20GN-20+5	5450#	102" X 20'+5' Tandem Dual 20,000# Gooseneck	
20GN-24+5	5920#	102" X 24'+5' Tandem Dual 20,000# Gooseneck	
20PH-20+5	5100#	102" X 20'+5' Tandem Dual 20,000# Pintle Hitch	
20PH-24+5	5580#	102" X 24'+5' Tandem Dual 20,000# Pintle Hitch	

OPTIONS

5' Center Pop-Up DT w/ 5' Fold Over Ramps	
Standard Spare Tire & Wheel - Load Range - E	
Tire Upgrade to ST235/85R16 LR-E	
Spare Upgrade to ST235/85 R16 LR-E	
L.E.D. Lighting	

Prices Effective August 1, 2006

© 2006 Copyright by Big Tree Trailer Manufacturing, Inc.