

PINTLE EQUIPMENT TRANSPORT


G.V.W.R.	30,000#	AXLES	Two 12,000# Heavy Duty Dual Wheel Electric Brake - Oil Bath
G.A.W.R. (Ea. Axle)	12,000#	SUSPENSION	Hutch 9700 Adjustable
COUPLER	60K 3" ID Pintle Eye	TIRE	ST235/85R16 Load Range F
SAFETY CHAINS	1/2" Grd. 80 w/Safety Latch Hooks (2 ea.)	WHEEL	16 X 6 Dual 8 Bolt
JACK	12,000# Screw Type Drop Leg Jack	FLOOR	2" Nominal Oak S4S
TONGUE	Integral w/ Frame	LIGHTS	D.O.T. Stop, Tail, Turn and Clearance
TOP RAIL	(none)	ELEC. PLUG	7-Way RV
FRAME	12" - 16 # I-Beam	FINISH (PREP)	Acid Etched w/White Phosphorus, Undercoated w/Panther 813 & Two Coats Primer
CROSSMEMBERS	6" Jr. I-Beam	FINISH	Painted w/2 Coats High Solid Supreme Acrylic Automotive Grade Enamel, and Pristriped
SIDE RAILS	8" Channel		

- Complete Break-A-Way System (Battery & Charger Included)
- Rubber Mounted Sealed Lighting
- 8" Channel Side Rails
- Safety Reflective Marker Tape
- (2) Side Bed Steps
- 12K Heavy Duty Oil Bath Axles w/ 12 1/4" X 5" Electric Heavy Duty Brakes
- Low Profile Bed
- 5' Dove Tail w/ Double Hinged Spring Assist Ramps
- Bolt On Jack
- Modular Sealed Wiring Harness
- Storage Area in Tongue
- 102" Wide
- Six 5/8" o.d. D-Rings
- Oak Flooring
- 3 Position Pintle Adjustment

24ED-20+5

DIMENSIONS- WITH DOVETAIL

LENGTH	A	B	C
20'+5'	300'	113'	187'
24'+5'	348'	137'	211'

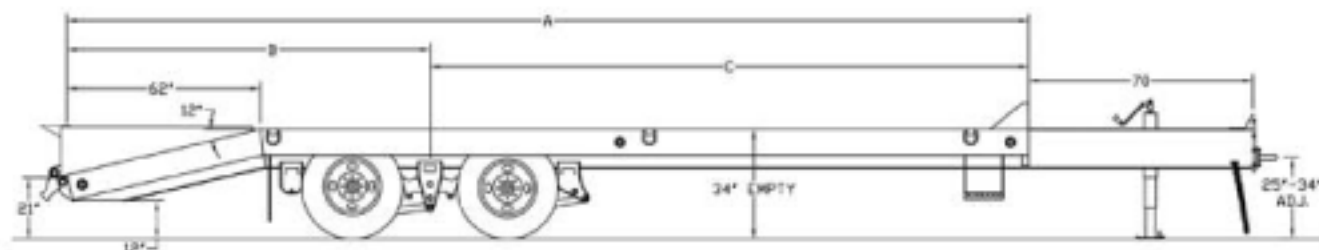

PRICING

MODEL #	WEIGHT	DESCRIPTION	PRICE
*24ED-20+5	6,000#	102" X 20' Tandem Dual 30,000# Pintle	13,667.00

* Trailer is subject to Federal Excise Tax.

OPTIONS

16" Spare Tire & Wheel LR-F	
Locking Lid Over Tool Storage in Tongue	
Vertical Spare Mount on Tongue	
Extra 5/8" D-Rings (ea.)	
Single 2 Speed Drop Leg Jack (25K)	
Dual 2 Speed Jack Set (150K)	
L.E.D. Lighting	