


LOWBOY HEAVY EQUIPMENT TRANSPORT

G.V.W.R.	59,800#	AXLES	Two 22,500# Dual Wheel Air Brake - Oil Bath
G.A.W.R. (G.A. 4814)	18,160#	SUSPENSION	Hutch 9700 Adjustable
COUPLER	2" Kingpin	TIRE	215/75R 17.5 Load Range H
JACK	Adjustable 4 Position Landing Legs	WHEEL	6.75 X 17.5 — 10 Bolt Budd
NECK	16" 31# I-Beam	FLOOR	2" Nominal Oak 8'S
FRAME	16" 31# I-Beam	LIGHTS	D.O.T. Stop, Tail, Turn and Clearance
CROSSMEMBERS	10" 12# I-Beam	ELEC. PLUG	7 Way Semi Style Socket
SIDE RAILS	12" Channel	FINISH (PREP)	Acid Etched w/White Phosphorus, Under-coated w/Parther 813 & Two Coats Primer
		FINISH	Painted w/2 Coats High Solid <i>Sigrens</i> Acrylic Automotive Grade Enamel, and Pinstriped

- Anti-Skid Brake System on Front Axle
- Rubber Mounted Sealed Lighting
- 12" Channel Side Rails
- Safety Reflective Marker Tape
- (2) Side Bed Steps
- 22.5K Heavy Duty Oil Bath Axles w/ 12 1/4" X 7 1/2" Air Brakes, Including Automatic Slack Adjusters & Spring Brakes on Both Axles
- Low Profile Bed
- 3' Dove Tail w/ Double Hinged Spring Assist Ramps
- Modular Sealed Wiring Harness w/Junction Box
- Storage Area In Neck
- 102" Wide
- Eight 1" o.d. D-Rings
- Oak Flooring

5XGL-20+3

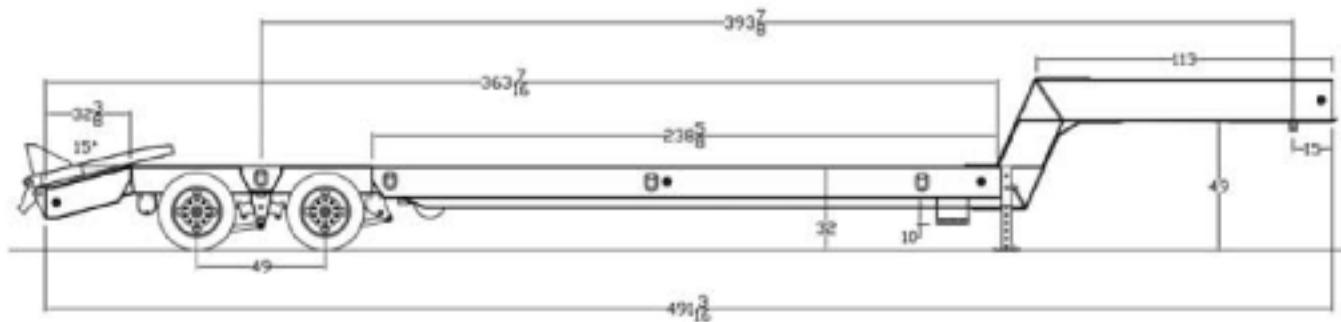

PRICING

MODEL #	WEIGHT	DESCRIPTION	PRICE
* 5XGL-20+3	11,600#	102" X 20' Equipment Transport	

* Trailer is subject to Federal Excise Tax.

OPTIONS

17.5" Spare Tire & Wheel	LR-H	
Full Width Neck		
Dual 2-Speed Landing Gear Set		
Plate Over The Tires		
ABS on 2nd Axle		
Extra 1" D-Rings (ea.)		
L.E.D. Lighting		

Prices Effective August 1, 2006

©2006 Copyright by Big Bear Trailer Manufacturing, Inc.