

PINTLE HEAVY EQUIPMENT TRANSPORT

G.V.W.R.	58,000#	AXLES	Three 22,500# Dual Wheel Air Brake - Oil Bath
G.A.W.R. (E.A. Axle)	18,160#	SUSPENSION	Hutch 9700 Adjustable
COUPLER	60K 3" ID Pintle Eye	TIRE	215/75R 17.5 Load Range H
SAFETY CHAINS	5/8" Grd. 80 w/ Safety Latch (2 ea.)	WHEEL	6.75 X 17.5 — 10 Bolt Budd
JACK	12,000# Screw Type Dropleg	FLOOR	2" Nominal Oak S&S
TONGUE	Integral w/ Frame	LIGHTS	D.O.T. Stop, Tail, Turn and Clearance
FRAME	14" X 26# I-Beam	ELCC. PLUG	7 Way Semi Style
CROSSMEMBERS	6" Jr I-Beam	FINISH (PREP)	Acid Etched w/White Phosphorus, Undercoated w/Parther 813 & Two Coats Primer
SIDE RAILS	8" Channel	FINISH	Painted w/2 Coats High Solid Supreme Acrylic Automotive Grade Enamel, and Pinstriped


- Anti-Skid Brake System on 2 Axles
- Rubber Mounted Sealed Lighting
- Safety Reflective Marker Tape
- 8" Channel Side Rail
- Low Profile Bed
- 22.5K Heavy Duty Oil Bath Axles w/ 12 $\frac{1}{4}$ " X 7 $\frac{1}{2}$ " Air Brakes, including Automatic Slack Adjusters & Spring Brakes on 3 Axles
- 5' Dove Tail w/ Double Hinged Spring Assist Ramps
- 3 Position Pintle Adjustment
- Modular Sealed Wiring Harness w/ Junction Box
- Storage Area In Tongue
- 102" Wide
- Six 1" o.d. D-Rings
- Oak Flooring

(Only Available In These Lengths)

5XPH-24+5

DIMENSIONS - WITH DOVETAIL

LENGTH	A	B	C
24'+5'	348"	134"	214"
28'+5'	396"	158"	238"

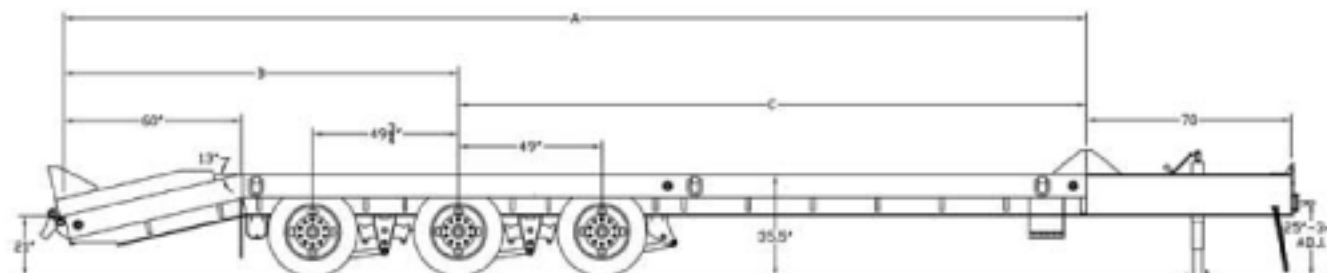

PRICING

MODEL #	WEIGHT	DESCRIPTION	PRICE
* 5XPH-24+5	10,350#	102" X 24' Triple Axle Equipment Transport	
* 5XPH-28+5	10,850#	102" X 28' Triple Axle Equipment Transport	

* Trailer is subject to Federal Excise Tax.

OPTIONS

17.5" Spare Tire & Wheel	
Dual 2-Speed Landing Gear Set	
Locking Lid Over Tool Storage in Tongue	
Vertical Spare Mount on Tongue	
Extra 1" D-Rings (ea.)	
Single 2 Speed Drop Leg Jack (25K)	
L.E.D. Lighting	
Wood Fill Detail & Ramps	

Prices Effective August 1, 2006

©2006 Copyright by Big Bear Trailer Manufacturing, Inc.