


# SINGLE AXLE PAN TILT TRANSPORT

G.V.WR.	6,000#	AXLE	One 6000# EZ LUBE Tbrflex Electric Brake
G.A.WR.	6,000#	SUSPENSION	Torsion
COUPLER	Adjustable 2-5/16" Bulldog	TIRE	ST235/85R16 Load Range E
SAFETY CHAINS	1/4" Grd. 70 w/ Safety Latch (2 ea.)	WHEEL	16 X 6 White Spoke 8 Bolt
JACK	2000# Swivel Mount	LIGHTS	D.O.T Stop, Tail, Turn and Clearance
TONGUE	2" X 4" Square Tubing	ELEC. PLUG	7-Way RV
BED	3/16" Steel Pan	FINISH (PREP)	Acid Etched w/White Phosphorus, Undercoated w/Panther 813 & Two Coats Primer
CROSSMEMBERS	3" Channel	FINISH	Painted w/ 2 Coats High Solid <i>Supreme</i> Acrylic Automotive Grade Enamel, and Pinstriped
FENDERS	16 Ga. Jeep Style		

- Complete Break-A-Way System w/Charger
- 1 Piece 3/16" Formed Pan
- Texturized Floor for Increased Traction
- Four D-Rings (Inside Pan)
- Tilt Bed w/ Heavy Duty Latch
- 6000# Axle w/ Electric Brake
- Cambered Ez Lube Axle
- 11 Degree Tilt Angle
- Fold Up Jack
- Safety Chains Secured w/ Cold Rolled Eyelets
- 78" Inside Dimension

## 60TP-12

LENGTH	DIMENSIONS		
	A	B	C
12'	144"	74"	70"

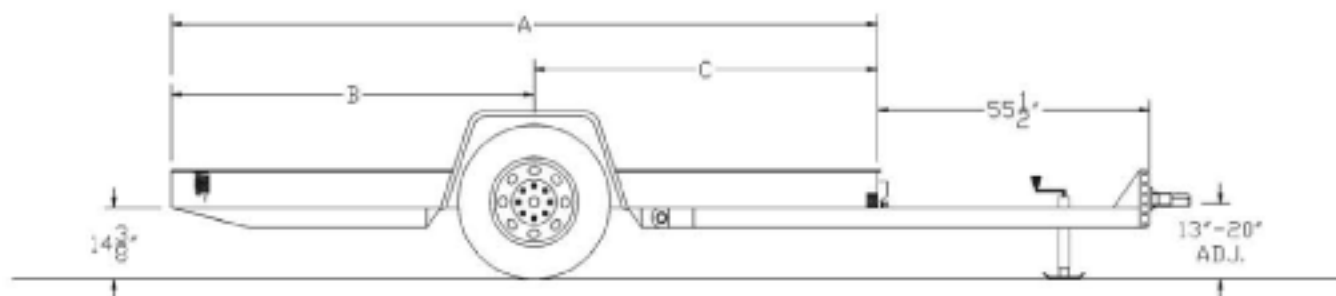

## PRICING

MODEL #	WEIGHT	DESCRIPTION	PRICE
60TP-12	1730#	78" X 12' Equipment Transport	

## OPTIONS

Hydraulic Brakes on 1 Axle, with 2-5/16" with Adjustable Demco Actuator	
16" Spare Tire & Wheel	
Spare Mount (Vertical on Tongue)	
Adjustable 3" Pintle	